

FMS Flush Mounting System (FMS1 & FMS-900)



www.concealite.com

Installation Instructions

1 Install the FA100, F5000, or FA900 recessed back box as described in the installation instructions provided separately with the product.

2 Install the Flush Mounting System trim into the back box before the installation of the surrounding wall or ceiling material.

3 After the surrounding wall or ceiling material is installed, adjust the position of the trim so that it is flush with the front edge of the wall or ceiling material. Securely tighten the four (4) set screws on the inner sides of the back box to secure the trim into its final position.

Compound can now be applied between perimeter of trim edges and the surrounding wall or ceiling material to a flush finish.

4 Product interior components can now be wired and installed as per product installation instructions.

5 Adjust the trim's four (4) adjusting screws to allow the fixture head assembly to be seated flush with the trim and the surrounding wall or ceiling material.

AFTER FINAL INSTALLATION THE FRAME IS FLUSH TO THE WALL SURFACE.

Optional:


After completing standard installation and test procedures, you may choose to apply additional compound to completely blend the outside edge of the fixture head assembly with the wall surface.



1 BACK BOX




2 FLUSH MOUNTING SYSTEM (FMS) INSTALLED INTO BACK BOX

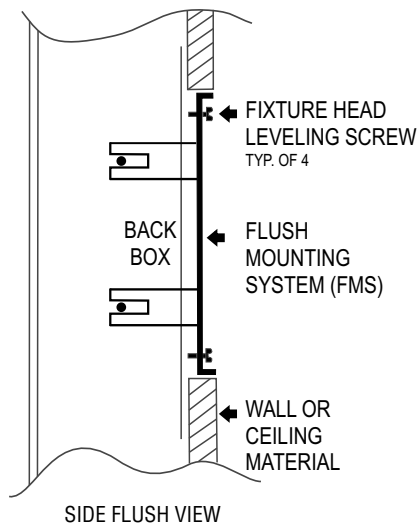

SIDE FLUSH VIEW



3 SET SCREW (4 Total)




4 INTERIOR WIRING



5 FOUR ADJUSTING SCREWS

FMS – Frameless Trim Ordering Information

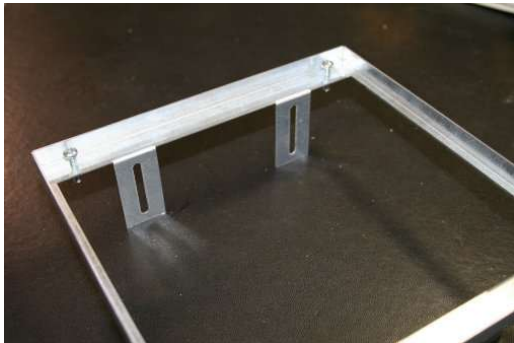


FLUSH MOUNTING SYSTEM TRIM

FMS System Available Fixtures:

FA100 & F5000 Series Part # **FMS1**


FA900 Part # **FMS900**



FA100
Horn/Strobes
Horns
Strobes
Speakers



NFPA 72
LAETL




F5000
Emergency Lighting



FA900
Speaker/Strobes



NFPA 72
LAETL

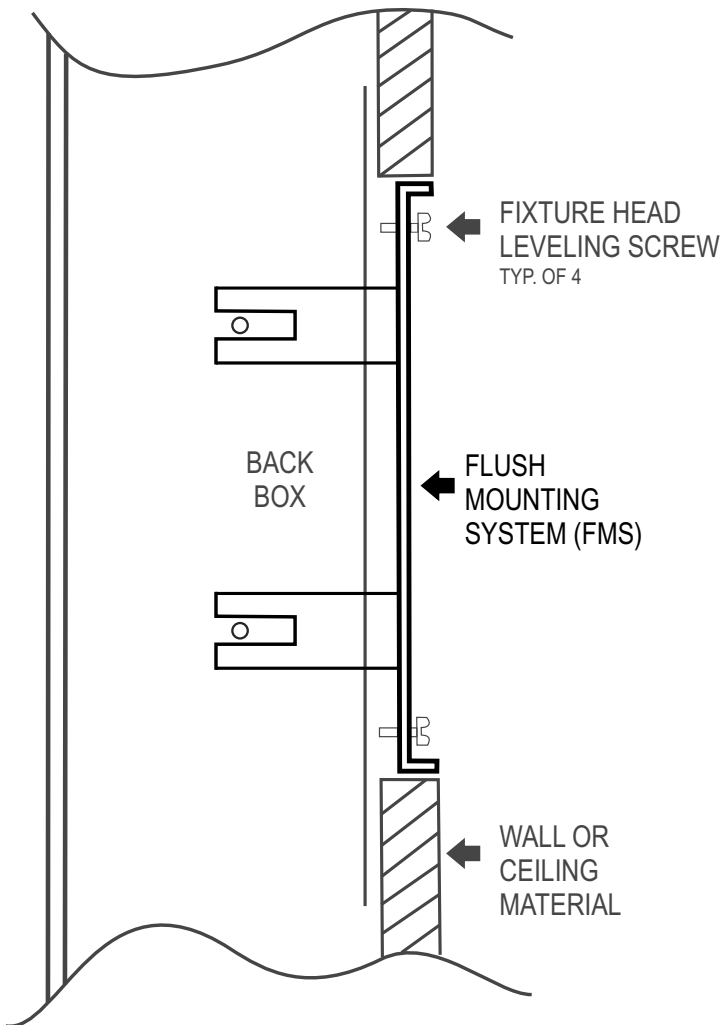

SIDE FLUSH VIEW



202 Elk Street, P.O. Box 160
Elkton, SD 57026
Phone: (605)542-4444
Fax: (605)542-3333
www.concealite.com